

AUSLIFT EQUIPMENT



Compact, agile and efficient



Scaffolding lift Junior G



The Böcker scaffolding lift Junior G

Compact, versatile and efficient

The Böcker Junior scaffolding lift is the result of decades of experience in the sector of construction lifts. With its small dimensions and minimal required space, it was developed specifically for the use on narrow construction sites. Thanks to its low dead load the lift can be pulled by almost any passenger car.


As from now the proven Junior production series is available with a platform for the scaffolding especially developed by practitioners.

Advantages at a glance

- Minimum required space, even while the machine is set up
- Fits through any narrow lane and even through standard-sized doors due to its retractable axle
- Retractable and removable ball-shaped coupling equally ensures extremely compact manoeuvring dimensions
- Transport with driving license B thanks to its considerably low dead weight (750 kg to 21 m)
- Easy manoeuvring and transport by almost any kind of passenger car
- Surpassing reliability as well as a maximum degree of operational convenience even for untrained personnel
- Powered by strong electric motors or petrol engines
- Payload of 200 kg with scaffolding platform or 250 kg with universal platform in combination with carriage speeds up to 48 m/min
- All functions fully hydraulic, extension and load winch with automatic slack rope safety device for a safe and easy operation

The Böcker scaffolding platform

- Scaffolding platform can be hooked directly into the rails without an additional slide
- Long wheelbase guarantees smooth vehicle dynamics of the platform even under full weight
- Especially hard-wearing floor thanks to the inset corrugated plate
- The platform is equipped with practical storage trays for small parts
- Additional holder for scaffolding tubes ensures a safe transport of the material
- Low loading height guarantees a comfortable way of working
- Further platforms and slides usable (optional)

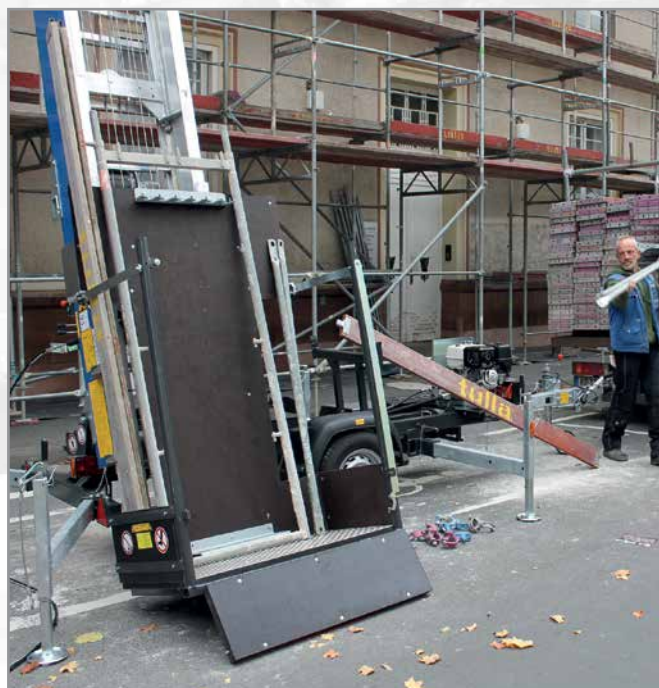

Further advantages in detail



Easy and safe unloading of the scaffolding material



Integrated and protected lights

Technical Data

Model	HD 18/0-5 Non-brake assisted	HD 18/0-5 Brake assisted	HD 21/0-6 Brake assisted	HD 18/0-5 Brake assisted	HD 21/0-6 Brake assisted	HD 24/0-7 Brake assisted
Payload	200 / 250 kg	200 / 250 kg	200 / 250 kg	200 / 250 kg	200 / 250 kg	200 / 250 kg
Gross vehicle weight	750	750	750	1.100	1.100	1.200
Driving license class	B	B	B	B96/BE	B96/BE	B96/BE
Dimensions						
Total length: Retracted for manoeuvring [mm] Extended for transport [mm]	4.090 4.890	4.165 4.900	4.165 4.900	4.165 4.900	4.165 4.900	4.165 4.900
Total width: Retracted for manoeuvring [mm] Extended for transport [mm]	870 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾
Guide rails: Length rail package [mm] Track width [mm]	4.005 540	4.005 540	4.005 540	4.005 540	4.005 540	4.005 540
Extendable from – to [m]	4,1 – 17,8	4,1 – 17,8	4,1 – 20,9	4,1 – 17,8	4,1 – 20,9	4,1 – 23,7
Tow bar	Retractable and removable ball shaped coupling	Straight, retractable and removable ball shaped coupling	Straight, retractable and removable ball shaped coupling	Straight, retractable and removable ball shaped coupling	Straight, retractable and removable ball shaped coupling	Straight, retractable and removable ball shaped coupling
Drive unit	Hydraulic unit 230 V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230 V, 2.6 kW	Hydraulic unit 230 V, 2.6 kW	Hydraulic unit 230 V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230 V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230 V, 2.6 kW or petrol engine ¹⁾

¹⁾ special equipment

²⁾ 1,270 mm standard axle

All rights reserved for changes in dimension and construction.

The scaffolding lift Junior in detail ...



Mechanical remote control



Electric motor



Petrol engine with electric starter
(optional)



Large lockable toolbox

Wheels on the head piece
movable at the side

Simple and safe unloading



Optimal management of the cable for minimal deflection of the rail package even under load

Scaffolding platform can be hooked directly into the rails without an additional carriage



Platform equipped with storage trays for small parts



Adjustable turntable



Retractable axle, manoeuvring width 0.89 m (optional)



Retractable drawbar





Contact Details

Auslift Equipment

**Factory 2/ 2-4 Souffi Place
Dandenong South. Vic. 3175**

Phone: (03) 9702 7977

Fax: (03) 9702 7966

Mobile: 0433 175 243

Email: sales@auslift.com.au