

AUSLIFT EQUIPMENT



Personnel-Lifts



ALP-Personnel-Lifts



PHC-Lift

Ideally suited to:

- Repair work
- Maintenance
- Assembly work
- Installation work
- Cleaning work

Small and manageable when transporting

All ALP-Personnel-Lifts are convincing through their perfected technology, superb finish as well as their efficiency. The telescopic extending special aluminium profiles are particularly lightweight and allow working heights of up to 14 meters.


Thanks to the standard loading unit, the ALP-Personnel-Lifts can be loaded onto a trailer or into a transporter in a one man operation. Even movement through small passage ways, standard doorways or transport in elevators is no problem due to the compactness of the lifts.

It goes without saying that all lifts conform to all current safety regulations.



PHC-Lift


The matching lift for every job

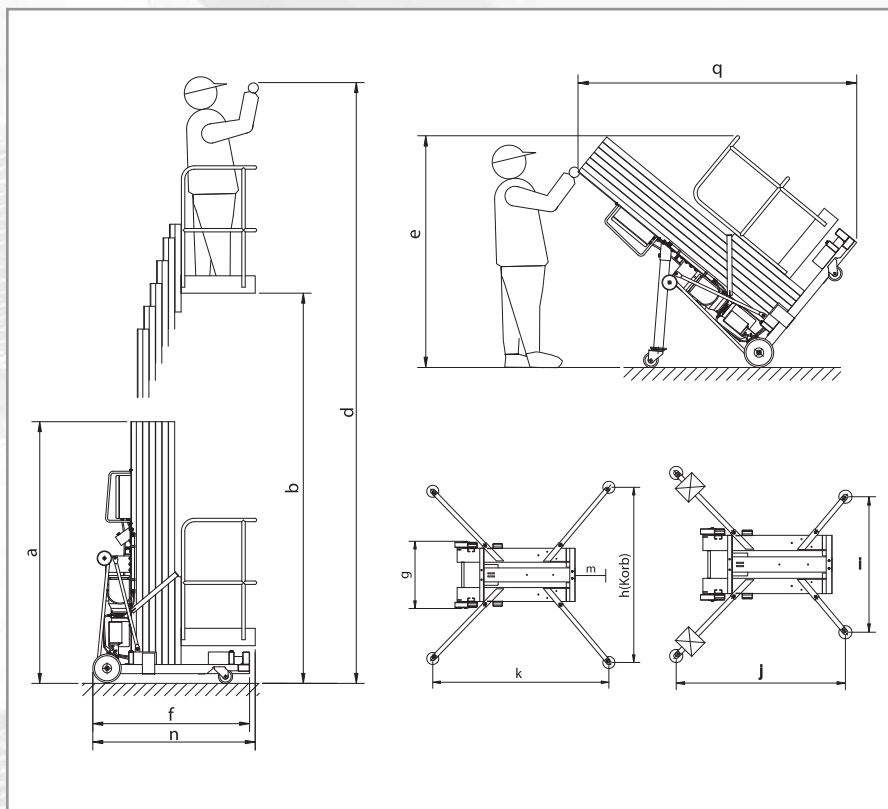

Technical Data

Model		PHC 650	PHC 800	PHC 940	PHC 1100	PHC 1200	PH 1300	PH 1400
Working height [m]	d	6.50	8.00	9.45	10.85	12.00	12.75	14.00
Platform height [m]	b	4.50	6.00	7.45	8,85	10.00	10.75	12.00
Platform load [kg]		140	140	140	140	135	135	115
Dimensions								
Height [m]	a	1.98	1.98	1.98	1.98	1.98	2.30	2.77
Width [m]	g	0.77	0.77	0.77	0.77	0.77	0.77	0.77
Length [m]	n	1.26	1.32	1.38	1.44	1.44	1.44	1,44
Length tipped [m]	q	-	-	-	-	-	2.40	2.85
Height tipped [m]	e	-	-	-	-	-	1.98	1.95
Area used (assembled) inner [m]	h x k	1.25 x 1.26	1.41 x 1.39	1.53 x 1.50	1.74 x 1.78	2.04 x 2.05	2.18 x 2.17	2.29 x 2.25
Area used (assembled) inner with ballast weights [m]	h x k	1.25 x 1.26	1.25 x 1.26	1.25 x 1.26	1.41 x 1.49	1.61 x 1.67	1.81 x 1.85	2.04 x 2.05
Area used (assembled) outer [m]	h x k	2.04 x 1.95	2.43 x 2.28	2.73 x 2.55	3.24 x 3.10	3.67 x 3.47	3.67 x 3.47	3.90 x 3.67
Area used (assembled) outer up against walls [m]	i x j	1.25 x 1.62	1.41 x 1.86	1.53 x 2.05	1.74 x 2.46	2.04 x 2.79	2.18 x 2.85	2.29 x 3.00
Distance from wall [cm]	m	9	10	9	21	34	40	45
Deadweight without ballast weights [kg]		250	280	300	330	345	394	430
Deadweight with ballast weights [kg]		294	354	384	414	429	478	514
Extension speed approx. [Sek.]		28	26	21	26	26	35	40

We reserve the right to make changes to the design, weight and dimensions of equipments.

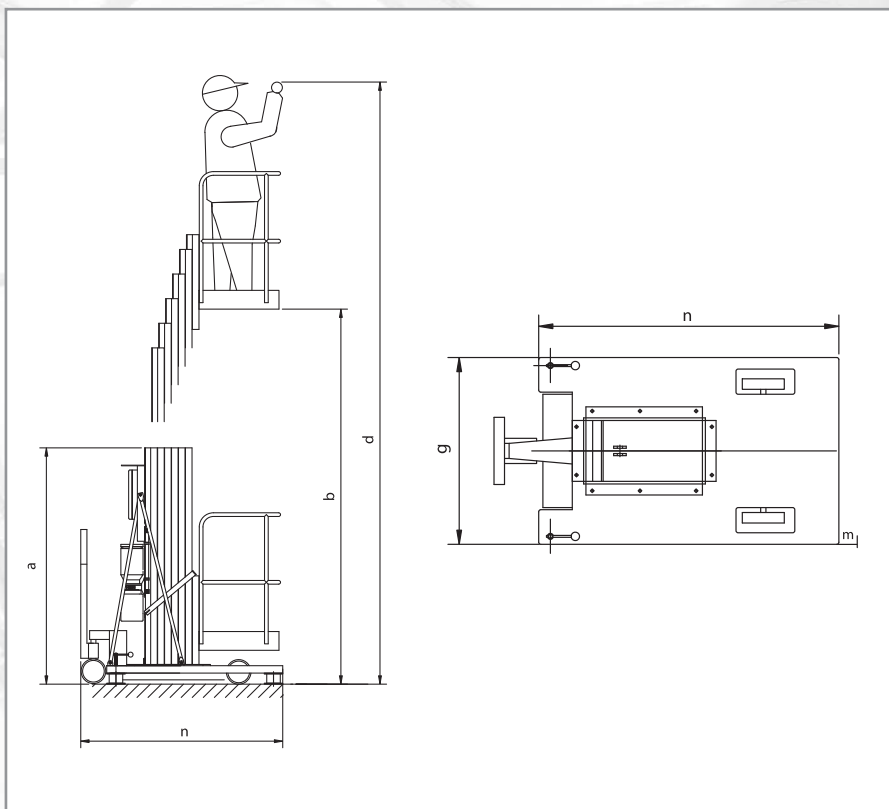

Technical Data

Model		PHC-HI 800	PHC-HI 940	PHC-HI 1100
Working height [m]	d	8.00	9.40	10.80
Platform height [m]	b	6.00	7.40	8.80
Platform load [kg]		140	140	140
Dimensions				
Height [m]	a	1.98	1.98	1.98
Width [m]	g	0.79	0,79	0.89
Length [m]	n	1.37	1.37	1.43
Area used (assembled) inner [m]	h x k	0.79 x 1.37	0.79 x 1.37	0.89 x 1.43
Distance from wall [cm]	m	0	0	0
Deadweight [kg]		678	715	825
Extension speed approx. [Sek.]		26	21	26


We reserve the right to make changes to the design, weight and dimensions of equipments.

Standard Equipment


All ALP-Personnel-Lifts come with comprehensive standard equipment which allows simple and user friendly operation.




1.5 KW drive motor



Hand or foot control as required




Extra control unit below




Outrigger transport barrow makes transport easier



Forklift pocket for problem free transport



Wheels with stabilizing brakes



Outrigger control unit with warning light



Loading unit with height adjustable wheels




Spirit level for correct and safe positioning




Accessories

The comprehensive choice of accessories offered by ALP-Personnel-Lifts by Böcker leaves practically nothing to be desired. We are however very happy to cover customer specific requirements and needs.



Power supply in working basket



Special wheels available for operation in differing locations




Crane lifting points for safe transportation



Tool box



Ballast weights for use with shorter outriggers



Counter weights for outriggers



Rotating (axis) wheels for 360° positioning



Extendable working basket



Protective cover





Contact Details

Auslift Equipment

**Factory 2/ 2-4 Souffi Place
Dandenong South. Vic. 3175**

Phone: (03) 9702 7977

Fax: (03) 9702 7966

Mobile: 0433 175 243

Email: sales@auslift.com.au