

AUSLIFT EQUIPMENT



Powerful and Compact



Avario Furniture Lift



The Böcker Avario Furniture Lift

Compact design with high performance

The Böcker HD Avario is an exceptionally modern furniture lift. It combines compact design and high performance in an unrivalled manner. Having a maximum load capacity of up to 400 kg and extending up to of 26 m, this model is as powerful as traditional furniture lifts. The HD Avario requires considerably less space on-site thanks to its compact rail package and offers improved towing characteristics due to no overhang at the rear of the trailer

The advantages at a glance

- maximum extension length of 26 m
- 400 kg load capacity (dependant on platform and carriage configuration)
- efficient Honda engine
- large tank for long operation time
- lifting speeds up to 60 m/min
- all engine functions can be controlled without removing the engine cover
- engine easily accessible for maintenance
- No-overhanging rail package and lower centre of gravity improves towing characteristics
- low-wear manoeuvring drive with positive connection (optional) ensures exact positioning on site
- galvanized and adjustable outriggers guarantee safe stand of the furniture lift

The Böcker furniture platforms

- large and flat platform surface offering sufficient space even for bulky goods
- side walls 90° and 180° foldable as well as removable
- rotatable and extendible platforms (optional)
- infinitely variable spindle (optional) for absolutely horizontal transport of furniture
- infinitely adjustable lower extension ensures low loading height



Further advantages in detail



Convenient transport by passenger cars



Operation panel of the manoeuvring drive

Technical specifications

Model	HD 26/1-7 LH
Payload [kg]	400
Gross vehicle weight [kg]	1,900
Maximum axle load [kg]	1,800
Average lifting speed [m/min]	50
Dimensions	
Vehicle length [mm]	5,800
Vehicle width [mm]	1,599
Guide rails	
Length rail package [mm]	4,850
Track width [mm]	540
Extendible up to [m]	25.87
Towbar	straight or height-adjustable
Drive unit	hydraulic aggregate Honda GX 390

All rights reserved for changes in dimension and construction!



Extremely compact and powerful



Infinitely adjustable spindle 17-87° (optional)



Automatic hydraulic handle lock (optional)



Electric pendant control operation from the base



Infinitely adjustable, mechanically releasable live-ring lock



Solid support wheel (optionally as double support wheel)


Wheels at the head piece **laterally adjustable** (optional)


Vertically and horizontally **adjustable guide rails** – for extremely smooth rail and carriage operation

Rails made of high-strength **aluminium alloy**, torsion-proof rail profile

Noise protection hood (optional)

Chassis with special finish made of a torsion-proof extruded profile for convenient attachment of accessories

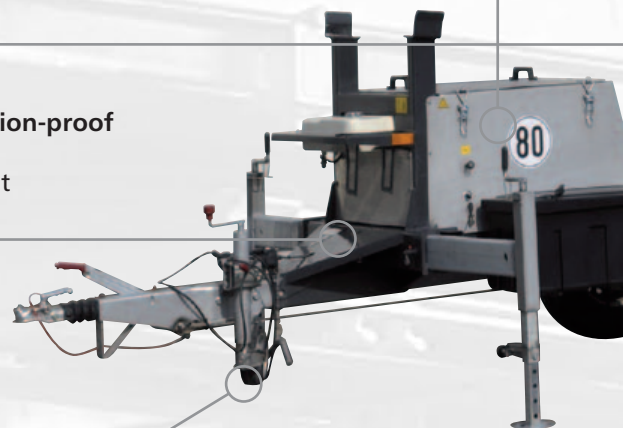

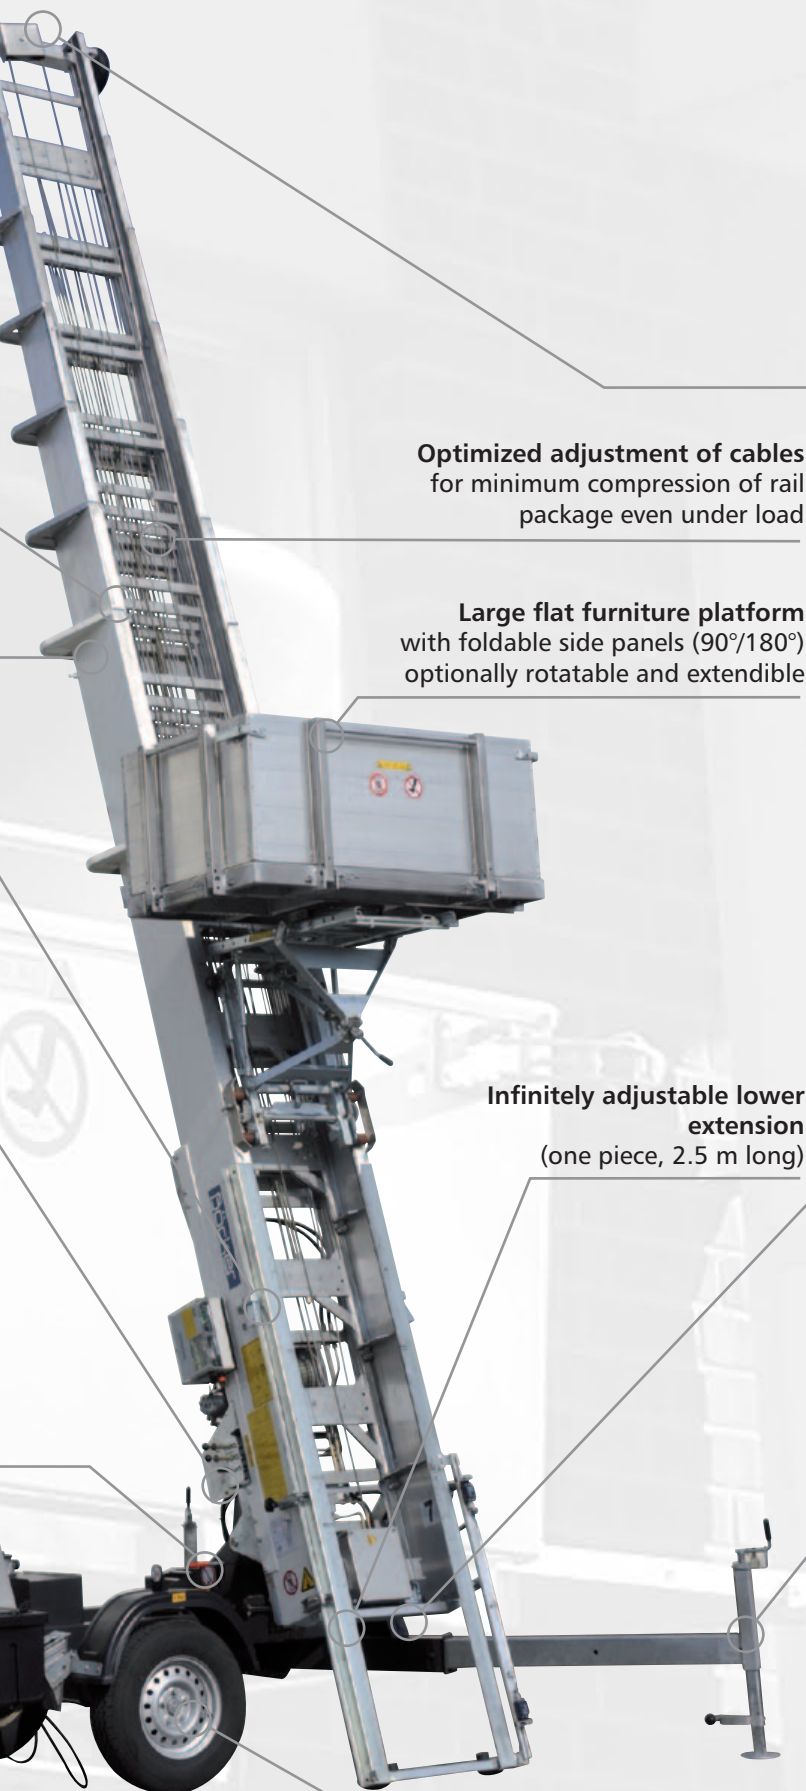


Optimized adjustment of cables
for minimum compression of rail
package even under load

Large flat furniture platform
with foldable side panels (90°/180°)
optionally rotatable and extendible

**Infinitely adjustable lower
extension**
(one piece, 2.5 m long)



Hand-held radio transmitter for
operation from top or base

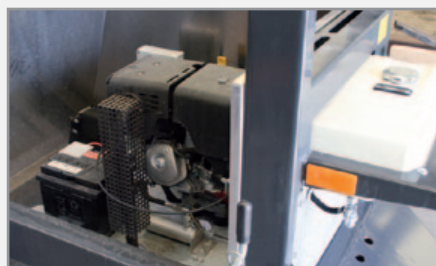

Efficient Honda engine and large
tank for long operation time



Integrated rear lights



Galvanized outriggers, extendible at
the front, pluggable at the rear



Powerful manoeuvring drive with
positive connection (optional)



Contact Details

Auslift Equipment

**Factory 2/ 2-4 Souffi Place
Dandenong South. Vic. 3175**

Phone: (03) 9702 7977

Fax: (03) 9702 7966

Mobile: 0433 175 243

Email: sales@auslift.com.au